




MARAZZI 




GM
Series











GM Antracite 60x60
GM Antracite 30x60






GM Beige 60x60
GM Beige 30x60








GM Grey 60x60
GM Brown 30x60





GM

60x60 - 30x60

MARAZZI

UNI EN 14411-G

Fine porcelain stoneware




KXTQ GM Antracite 30x60
LF28 GM Antracite 60x60



KXTR GM Grey 30x60
LF27 GM Grey 60x60



L02Z GM Brown 30x60
LF26 GM Brown 60x60

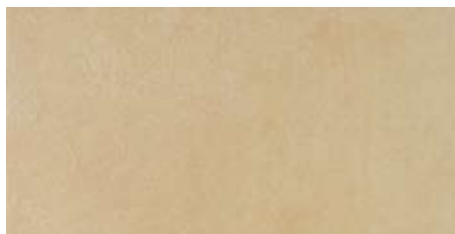

L02Y GM Beige 30x60
LF25 GM Beige 60x60

Technical Features


	Testing method	Measurement unit	SG SERIES Typical values	Established limits	Reference standard
Water absorption in %	ISO 10545-3	%	< 0,5	≤ 0,5% Maximal single value 0,6	UNI EN 14411-G
Dimensions (A)	ISO 10545-2	%	Complies with the standars	Surface S (cm ²) > 410	UNI EN 14411-G
Length and width (B)				± 0,6%	
Thickness				± 0,5	
Bending Strength	ISO 10545-4	N / mm ²	≥ 35	≥ 35 N/mm ² Minimum single value 32	UNI EN 14411-G
Breaking Load	ISO 10545-4	N (Kg)	≥ 2100	Thickness ≥ 7,5 mm ≥ 1300N	UNI EN 14411-G
60x60 / 30x60 thickness 10 mm.	-	-	-		


(A) Reference size 30x30 cm.

(B) Allowed % difference of the average value, for each tile, from the production size.

Size (cm)	Material of Box	Dimension of Box (cm)	Dimension of Pallet (cm)	Kg/Box	Piece/Box	Sqm/Box	Kg/Sqm
60x60	3 - Layer Cardboard box	61x61x4,8	110x110x70	35	4	1,44	24,00
30x60	3 - Layer Cardboard box	60,9x30,8x6,7	120x80x70	24	6	1,08	22,00

Size (cm)	Box/Pallet (up)	Kg/Loaded pallet (up)	Pallets/Ctnr 21.5 tons	Boxes/Ctnr 21.5 tons	Pallets/Ctnr 24 tons	Boxes/Ctnr 24 tons
60x60	36	1260	17	612	19	684
30x60	44	1056	20	880	22	968





MARAZZI 

MG China Trading Limited
Room 2003-04, 20/F,
Tung Chiu Commercial Centre,
193 Lockhart Road,
Wan Chai,
Hong Kong

T +852 252 908 12
+852 252 908 13
F +852 252 029 86
E info@marazzichina.com
www.gruppomarazzi.com

